

# Improved Clustering Based Routing Protocol for Wireless Sensor Networks

Mrs. Naziya Naved Shaikh<sup>1</sup>, Dr. M. U. Kharat<sup>2</sup>

M.E Student, Dept. of Computer Engg G. H. Raison College of Engineering and Mgmt., Wagholi, Nagar Road, Pune<sup>1</sup>

Dept. of Computer Engg, Institute of Engineering, METs Bhujbal Knowledge City, Adgaon, Nashik<sup>2</sup>

**Abstract:** In wireless sensor networks (WSNs) the goal of Compressive sensing (CS) will cut back the variety of information transmissions and balance the traffic load throughout networks. But total number of transmissions for information assortment by victimisation pure CS is still massive. The hybrid method of victimisation cs was proposed to cut back the amount of transmissions in sensor networks. In the literature major work was done over CS technique is predicated on routing trees. Therefore, this permits us to proposed new cluster based mostly technique that uses hybrid CS for sensor networks with goal of raising the transmission performance and energy efficiency. The sensor nodes are organized into clusters. Within a cluster, nodes transmit data to cluster head (CH) while not victimisation CS. CHs use CS to transmit information to sink. We 1st propose an analytical model that studies the relationship between the scale of clusters and range of transmissions within the hybrid cs technique, aiming at finding the optimal size of clusters that will result in minimum range of transmissions. Then, we propose a centralized cluster algorithm based mostly on the results obtained from the analytical model. Finally, we present a distributed implementation of the cluster technique. In this project, we additionally are that specialize in rising the performance of energy consumption and WSN security victimisation recent Secure and efficient information transmission (SET) technique.

**Keywords:** Wireless sensor networks, clustering, compressive sensing, data collection

## I. INTRODUCTION

In many detector network applications, such as environment monitoring systems, sensor nodes would like to collect information sporadically and transmit them to the information sink through Multihop. According to field experiments, data communication contributes majority of energy consumption of detector nodes. It has become a very important issue to cut back the number of information transmissions in sensor networks. The emerging technology of compressive sensing (CS) opens new frontiers for information assortment in detector networks and target localization in detector networks. The CS technique will considerably cut back the quantity of information transmissions and balance the traffic load throughout the entire network.

The basic idea of cs works is as follows, as shown in Fig. 1. Suppose the system consists of one sink node and N sensor nodes for collection knowledge from the sector. Let  $x$  denote a vector of original data collected from sensors. Vector  $x$  has N elements, one for each sensor.  $x$  can be described by  $s$ , i.e.,  $x = \Phi s$ , where  $\Phi$  is an N remod basis, and  $s$  is a vector of coefficients. If there are at most  $k$  ( $k < N$ ) nonzero components in  $s$ ,  $x$  is called  $k$ -sparse within the domain. When  $k$  is tiny, instead of transmitting N knowledge to the sink, we will send little variety of projections of  $x$  to the sink, that is,  $y = \Phi^T x$ , where  $\Phi^T$  is an  $M \times N$  ( $M < N$ ) random matrix (called the measuring matrix) and  $y$  is a vector of M projections. At the sink node, after collection  $y$ , the original data  $x$  is often recovered by victimisation '1-norm decrease or different heuristic algorithms, such as orthogonal matching pursuit.




Fig.1. Data collection with the pure CS method in the tree structure

In data gathering while not victimisation CS, the nodes close to tree leaves relay fewer packets for different nodes, but the nodes close to the sink need to relay way more packets. By using CS in information gathering, every node wants to transmit M packets for a collection of N data items. That is, the number of transmissions for collection information from N nodes is MN, which is still an outsized range. In the hybrid method, the nodes close to the leaf nodes transmit the initial information while not victimisation the CS technique, but the nodes close to the sink transmit information to sink by the CS technique. Xiang et al. applied hybrid CS in the information assortment and proposed an aggregation tree with minimum energy consumption. The previous works use the CS technique on routing trees. Since the clustering technique has several benefits over the tree technique such

as fault tolerance and traffic load levelling, we use the CS technique on the cluster in sensor networks. The clustering technique usually has higher traffic load equalization than the tree knowledge gathering technique. This is because the quantity of nodes in clusters are often balanced once we divide clusters. In addition, the previous works ignored the geographic locations and node distribution of the detector nodes. While in detector networks, the information of node distribution will facilitate the look of knowledge gathering technique that uses less data transmissions. In this paper, we propose a clustering method that uses the hybrid CS for sensor networks. The sensor nodes are organized into clusters. Within a cluster, nodes transmit data to the cluster head (CH) without using CS. A data gathering tree spanning all CHs is constructed to transmit data to the sink by using the CS method. One important issue for the hybrid method is to determine how big a cluster should be. If the cluster size is too big, the number of transmissions required to collect data from sensor nodes within a cluster to the CH will be very high. But if the cluster size is too small, the number of clusters will be large and the data gathering tree for all CHs to transmit their collected data to the sink will be large, which would lead to a large number of transmissions by using the CS method. In this regard, we first propose an analytical model that studies the relationship between the size of clusters and number of transmissions in the hybrid CS method, aiming at finding the optimal size of clusters that can lead to minimum number of transmissions. Then, we propose a centralized clustering algorithm based on the results obtained from the analytical model. Finally, we present a distributed implementation of the clustering method.

## II. LITERATURE SURVEY

In this section we are presented the review of different methods presented for mining high utility item sets from the transactional datasets. R. Szewczyk, A. Mainwaring, J. Polastre, J. Anderson, and D. Culler Habitat and environmental observation are a driving application for wireless detector networks. They present an analysis of knowledge from a second generation sensor networks deployed during the summer and time of year of 2003. During a 4-month preparation, these networks with 150 devices, produced distinct datasets for each systems and biological analysis. This paper concentrate on nodal and network performance, with emphasize on lifetime, dependability, and the static and dynamic aspects of single and multi-hop networks. They compare the results is collected to expectations set during the design phase: They were ready to accurately predict time period of the single-hop network, but we ignore the impact of mullioning's traffic overhearing and the nuances of power source selection. During this time, initially packet loss information was in proportion to with lab experiments, over the duration of the reliability, deployment of the backend infrastructure and the transit network had an authoritative impact on overall network performance.

E. Candes and M. Wakin, Conventional approaches to sampling signals or images follow Shannon's theorem: the sampling rate must be at least double the maximum frequency gift within the signal. In the part of conversion, standard Analog-to-digital converter (ADC) technology plants the standard quantized Claude Elwood Shannon illustration - the signal is uniformly sampled at or above the sampling rate. This article studies the theory of compact sampling, also known as compressed sensing or caesium, a novel sensing or sampling paradigm that goes versus the common wisdom in information acquisition. CS theory declares that one can recover specific signals and images from so much fewer samples or measurements than traditional methods use.

R. Baraniuk, Compressive sensing is a new sort of sampling theory, which guesses that distributed signals and images will be reconstructed from what was previously believed to be incomplete information. As a primary feature, efficient algorithms such as? 1-minimization will be used for recovery. The theory has many possible applications in signal processing and imaging. This chapter provides a presentation and overview on theory and numerical aspects of compressive sensing.

J. Haupt, W. Bajwa, M. Rabbat, and R. Nowak, this article describes a very different approach to the decentralized compression of networked information. Considering a specific major aspect of this struggle that revolves around large-scale distributed sources of information and their storage, transmission, and retrieval. The job of sending information from one point to another may be a common and well-understood development. But the problem of with efficiency transmitting or sharing information from and among a massive number of distributed nodes remains an outstanding challenge, mainly because we do not however have well prepared theories and tools for distributed signal processing, communications, and information theory in large-scale networked systems.

Compressive Data Gathering for Large-Scale Wireless sensing element Networks, this paper presents the first apply compressive sampling theory to sensing element information gathering for large scale wireless sensing element networks. The prosperous scheme developed in this research is planned to supply contemporary frame of mind for research in compressive sampling applications and large-scale wireless sensing element networks. They consider the scenario in that an outsized range of sensing element nodes are densely deployed and sensing element readings are spatially correlated. The proposed compressive information collecting is capable to drop down global scale communication cost without specifying intensive calculation or sophisticated transmission control. The load balancing attribute is capable of expanding the lifetime of the whole sensing element network also as individual sensors. The proposed scheme can cope with abnormal sensing element readings graciously. They also carry out the analysis of the network capability of the proposed compressive information gathering and validate the analysis through ns-2 simulations. More considerably,

this novel force into less space required information gathering has been tested on real sensing element information and the outcomes show the effectively and strength of the proposed theme.

J. Wang, S. Tang, B. Yin, and X.-Y. Li, Data Gathering in Wireless Sensor Networks through Intelligent Compressive Sensing, in which by introducing autoregressive (AR) model into the reconstruction of the sensed knowledge, the local correlation in sensed knowledge is exploited and so local adjective sparseness is achieved.

The recovered data at the sink is evaluated by utilizing serial reconstructions, the relation between error and measurements. Then the number of measurements is adjusted in step with the variation of the sensed knowledge. Furthermore, a novel abnormal readings detection and identification mechanism supported combinational sparseness reconstruction is proposed.

### III. PROPOSED APPROACH FRAMEWORK AND DESIGN

#### A. Problem Definition

Improved Clustering Based Routing Protocol for Wireless Sensor Networks For WSNS, with the use of CS in data gathering, every node needs to transmit M packets for a set of N data items. That is, the number of transmissions for collecting data from N nodes is MN, which is still a large number. In the hybrid method, the nodes close to the leaf nodes transmit the original data without using the CS method, but the nodes close to the sink transmit data to sink by the CS technique.

Applied hybrid CS in the data collection and proposed an aggregation tree with minimum energy consumption. Clustering is a standard approach for achieving efficient and scalable performance in wireless sensor networks. Traditionally, clustering algorithms aim at generating a number of disjoint clusters that satisfy some criteria. Previously, a novel clustering problem that aims at generating overlapping multi-hop clusters have formulated. Overlapping clusters are useful in many sensor network applications, including inter-cluster routing, node localization, and time synchronization protocols. A randomized, distributed multi-hop clustering algorithm (KOCA) for solving the overlapping clustering problem is also proposed.

KOCA aims at generating connected overlapping clusters that cover the entire sensor network with a specific average overlapping degree. Through analysis and simulation experiments we show how to select the different values of the parameters to achieve the clustering process objectives. Moreover, the results show that KOCA produces approximately equal-sized clusters, which allows distributing the load evenly over different clusters. In addition, KOCA is scalable; the clustering formation terminates in a constant time regardless of the network size. However, this methods having limitations such as 1) Geographic locations and node distribution of the sensor

nodes are ignored. 2) There is no efficient method for data security used with proposed method and 3) Performance of energy consumption was not evaluated.

Proposed Design:

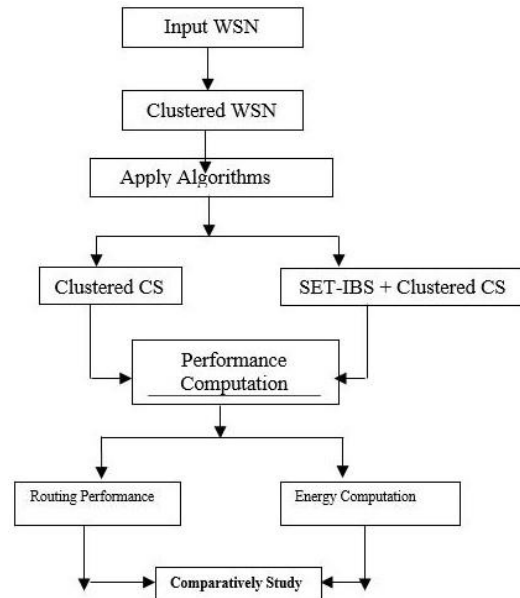


Fig.2. Proposed Design

The proposed SET-IBS has a protocol initialization before the network preparation and operates in rounds during communication, which consists of a setup phase and a steady-state phase in each round. We introduce the protocol initialization, describe the key management of the protocol by using the IBS scheme, and the protocol operations afterwards. Protocol Initialization in SET-IBS, time is divided into successive time intervals as other LEACH-like protocols. We denote time stamps by  $T_s$  for BS-to-node communication and by  $t_j$  for leaf-to-CH communication. Note that key pre-distribution is an efficient method to improve communication security, which has been adapted in WSNs in the literature. In this paper, we adopt IDkt as user's public key under an IBS scheme, and propose a novel secure data transmission protocol by using IBS specifically for CWSNs (SET-IBS). The corresponding private pairing parameters are preloaded in the sensor nodes throughout the protocol initialization. In this way, when a sensor node wants to authenticate itself to another node, it does not get to obtain its personal key at the beginning of a replacement round. Upon node revocation, the BS broadcasts the compromised node IDs to all sensor nodes, each node then stores the revoked IDs within the current round. We adopt the additively similarity encryption scheme in to encrypt the plaintext of perceived information, in which a specific operation performed on the plaintext is cherish the operation performed on the ciphertext. Using this scheme allows economical aggregation of encrypted data at the CHs and the b.s, which also guarantees information confidentiality. In the protocol initialization, the BS performs the following operations of key pre-distribution to all the sensor nodes:

IV. PRACTICAL RESULTS AND ENVIRONMENT

A. Work Done:

1. This tool is developed using Java-swing.
2. We have used Eclipse IDE for the development.
3. It is based on CS Hybrid algorithm.

B. Hardware and Software Specifications


Hardware Configuration:

- Processor : Pentium IV 2.6 GHz
- RAM : 512 MB DD RAM
- Hard disk : 20 GB

Software Configuration:

- Front End : JAVA
- Tools Used : Net Beans 7.2.1 and above
- Operating System: Windows XP/7

C. Mathematical Model:

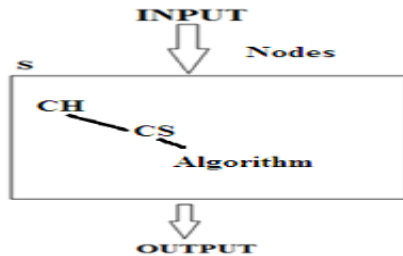

Input = {N, d}

Output = {reduce data transmission}

Where,

S: System which represented flow of project

N: nodes

d: data

INPUT:

Step1: Deploy nodes in wireless sensor network.

Step2: data transmission

$$D_{MAX} = \sqrt{\frac{N}{\lambda \alpha^2}}$$

The value of D lies in the interval, and it will be determined later through our analysis.

Step3: - Thus, the number of data transmissions for all sensor nodes within a cluster to transmit their data to the CH is

$$\left(1 + \sum_{h=2}^{\frac{D+1}{2}} 8(h-1)\right) * \lambda \alpha^2 - \left(\frac{D^3 - D}{3} + D^2\right) * \lambda \alpha^2$$

$$\left(\frac{D^3 - D}{3} + D^2\right) * \lambda \alpha^2 * \frac{N}{\lambda D^2 \alpha^2} = \left(\frac{D}{3} - \frac{1}{3D} + 1\right) * N$$

Step4: -Our objective is to minimize total number of transmissions of the hybrid CS method in cluster structure, which is the sum of the intra-cluster transmissions and the inter classed transmissions.

$$T = T_{intra} + T_{inter}$$

$$= \left(\frac{N}{3} - \frac{M}{2}\right) * D + \left(\frac{NM}{\lambda \alpha^2} - \frac{N}{3}\right) * \frac{1}{D}$$

$$= \left(\frac{N}{3} - \frac{M}{2}\right) * D + \left(\frac{NM}{\lambda \alpha^2} - \frac{N}{3}\right) * \frac{1}{D}$$

$$= c_1 * D + c_2 * \frac{1}{D}$$

Output:

Clusters and Energy consuming

D. Results

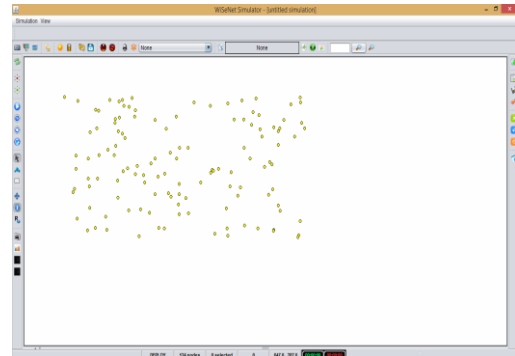


Fig.3. Number of Nodes

In this screen we are deploy a number of node

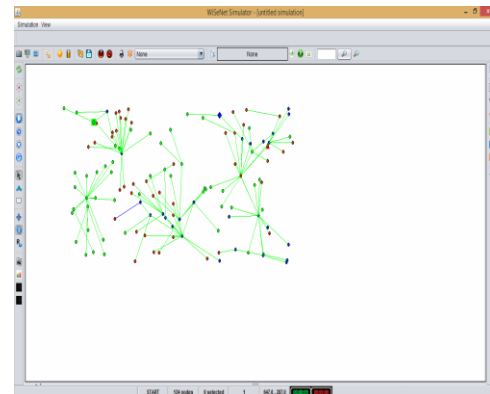


Fig4. Nodes communication to sink

In this screen a number of nodes are connect and communicate to the sink

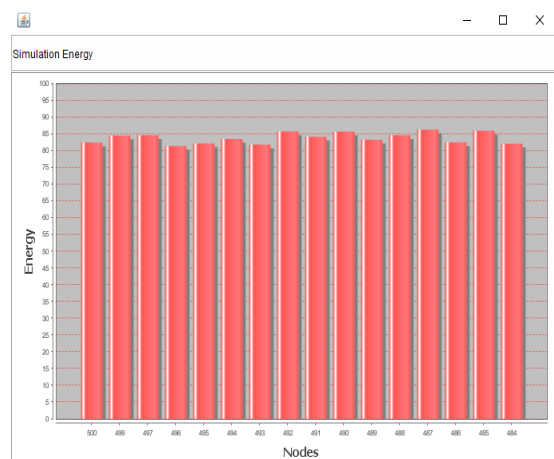


Fig.5. Energy graph

In this screen we can see energy graph for different nodes.

## V. CONCLUSION

In this research work, going to address the research issues of WSNs associated with WSNs security and information aggregation in WSNs. Both drawback domains having major impact of efficiency of WSNs. Recently many strategies return to attain either effective security or efficient information aggregation. However, in this project we are presenting the new hybrid technique within which we are aiming to mix benefits of 2 recently given ways for WSNs security and In-Network information aggregation methodology to attain the higher security yet as routing performance of WSNs. In SET-IBS, security relies on the hardness of the Die-Hellman drawback in the pairing domain. In the evaluation section, we provided feasibility of the planned SET-IBS and SET-IBOOS with respect to the safety needs and analysis against routing attacks.

## REFERENCES

- [1] "Efficient wireless reprogramming through reduced bandwidth usage and opportunistic sleeping", Rajesh Krishna Panta a, \*, Saurabh Bagchi a, Issa M. Khali, 2007.
- [2] Stathopoulos, T., Heidemann, J. Estrin, D.: A Remote Code Update Mechanism for Wireless Sensor Networks. CENS Tech. Report 30. Centre for Embedded Networked Sensing, UCLA (2003).
- [3] Devanbu, P., Gertz, M., Stubblebine, S.: Security for Automated, Distributed Configuration Management. ICSE99 Workshop on Software Engineering over the Internet. USC (1999) 1-10.
- [4] Levis, P., Patel, N., Culler, D., Shenker, S.: Trickle: A Self-Regulating Algorithm for Code Propagation and Maintenance in Wireless Sensor Networks. In: Proc. of the First USENIX/ACM Symposium on Network Systems Design and Implementation (NSDI 2004), San Francisco, CA, Mar. USENIX (2004) 15-28.
- [5] Hui, J., Culler, D.: The Dynamic Behavior of a Data Dissemination Protocol for Network Reprogramming at Scale. In: Proc. of the 2nd international conference on Embedded Networked Sensor Systems, Baltimore, Maryland, USA. ACM (2004) 81-94.
- [6] Beutel, J., Dyer, M., Meier, L., Ringwald, M., Thiele, L.: Next-Generation Deployment Support for Sensor Networks. TIK-Report No: 207. Computer Engineering and Networks Lab, Swiss Federal Institute of Technology (ETH), Zurich (2004).
- [7] Liu T., Martonosi, M.: Impala: A Middleware System for Managing Autonomic, Parallel Sensor Systems. In: Proc. of the ACM SIGPLAN Symposium on Principles and Practice of Parallel Programming (PPOPP03), June 1113, San Diego, California, USA. ACM (2003) 107-118.
- [8] Kulkarni, S.S., Arumugam, M.: Infuse: A TDMA Based Data Dissemination Protocol for Sensor Networks. Technical Report MSU-CSE-04-46. Dept. of Computer Science and Engineering, Michigan State University, MI (2004).
- [9] Jeong, J., Kim, S., Broad, A.: Network Reprogramming. TinyOS documentation. Available at: <http://webs.cs.berkeley.edu/tos/tinyos-1.x/doc/NetworkReprogramming.pdf>. Berkeley (2003).
- [10] A. Eswaran, A. Rowe, and R. Rajkumar. Nano work: an energy-aware resource centric rtos for sensor networks. In Proceedings 26th IEEE International Real-Time Systems Symp (RTSS 2005), 2005.
- [11] E. Gal and S. Toledo. Transactional ashes file system for microcontrollers in Proceedings of the annual Conference on USENIX Annual Technical Conference, pages 7.
- [12] N. Gershenfeld, R. Krikorian, and D. Cohen. The internet of things. Scientific American, 291(4):7681, 2004.
- [13] Xiaolin Wu; Lian Guan;" Acceleration of the LBG algorithm" IEEE Transactions on Communications, Volume 42, Issue 234, Part 3Page(s):1518 - 1523, February/March/April 1994.
- [14] B. P. Bogert, M. J. R. Healy, and J. W. Tukey: "The quefrency analysis of time series for echoes: cepstrum, pseudo-auto covariance, cross-cepstrum, and saphe cracking". Proceedings of the Symposium on Time Series Analysis (M. Rosenblatt, Ed) Chapter 15, 209-243. New York: Wiley, 1963.
- [15] Martin, A. and Przybocki, M., "The NIST Speaker Recognition Evaluations: 1996-2000", Proc. Odyssey Workshop, Crete, June 2001
- [16] Martin, A. and Przybocki, M., "The NIST 1999 Speaker Recognition Evaluation—An Overview", Digital Signal Processing, Vol. 10, Num. 1-3. January/April/July 2000
- [17] Claudio Becchetti and Lucio Prina Ricotti, "Speech Recognition", Chichester: John Wiley & Sons, 2004.
- [18] John G. Proakis and Dimitris G. Manolakis, "Digital Signal Processing", New Delhi: Prentice Hall of India. 2002.
- [19] Rudra Pratap. Getting Started with MATLAB 7. New Delhi: Oxford University Press, 2006 [20] R. Chasseing, DSP Applications Using C and the TMS320C6x DSK, Wiley, New York, 2002.
- [20] D. Reynolds, et. al., "The super SID project: exploiting high-level information for high-accuracy speaker recognition," in Proc. International Conference on Audio, Speech, and Signal Processing, Hong Kong, April 2003, vol. 4, pp. 784–787.
- [21] D. Klus' a'cek, J. Navr'atil, D. A. Reynolds, and J. P. Campbell, "Conditional pronunciation modelling in speaker detection," in Proc. IEEE International Conference on Acoustic, Speech, and Signal Processing, 2003, vol. 4, pp. 804–807.