

A New Model for Calculating Well Trajectory

Samir M. Khaled, PhD

Mining and Petroleum Engineering Department, Faculty of Engineering, Al-Azhar University

Abstract: There are many calculation techniques for determining the trajectory of the wellbore. The most common techniques are tangential method, balanced method, angle averaging method, radius of curvature method and minimum curvature method. This paper presents a comparison study among five different models used to calculate the well trajectory using actual field data for different well profiles (build & hold, S shape and modified S trajectory). A new model was developed for calculating the well trajectory and compared with different models mentioned above using the same data and the same well profiles. The results obtained during the present work indicated that the new model is more accurate than the other methods for calculating the true vertical depth. At calculate Horizontal displacement, northing and easting different methods give very close agreement, with the exception of the tangential method.

Keywords: Trajectory, tangential method, balanced method, angle averaging method.

1. INTRODUCTION

Controlled directional drilling can be defined as a science of deviating a well bore along a planned course to a subsurface target whose location is a given lateral distance and direction from the vertical. At a specified vertical depth, this definition is the fundamental concept of controlled directional drilling even in a well bore which is held as close to vertical as possible as well as a deliberately planned deviation from the vertical.

To control the deviating a well bore, a number of survey calculation methods have been used in directional drilling. Most common type: Tangential, Average angle, Balanced, Radius of Curvature and Minimum Curvature method.

Regardless of which conventional survey method is used, the following three pieces of information are known at the end of a successful survey, Measured Depth, Borehole Inclination and Borehole Azimuth (corrected to relevant North). In order to ascertain the latest bottom-hole position, it is necessary to perform a survey calculation which includes the three inputs listed above. Only then can the latest bottom-hole coordinates be plotted on the directional well plot (True vertical depth vs Horizontal displacement on the vertical plot and (Northing N/S vs Easting E/W) rectangular coordinates on horizontal plot). The more common methods that have been adopted are described in the following paragraphs.

Tangential method: The mathematics uses the inclination and direction at a survey station and assumes the inclination angle remain constant over the measured depth.

Average angle method: When using the average angle method, the inclination and azimuth at the lower and upper survey stations are mathematically averaged, and then the wellbore course is assumed to be tangential to the average inclination and azimuth. The calculations are very similar to the tangential method

Balanced tangential method: This model uses the survey data from both the upper and lower stations. The model

assumes that the well path lies along two equal length, straight line segments. The inclination and direction of each segment is given by the corresponding survey station. The tangential model is therefore applied twice - once to the upper half, once to the lower half. [2, 9]

Radius of curvature method: The method assumes the wellbore course is a smooth curve between the upper and lower survey stations. The curvature of the arc is determined by the survey inclinations and azimuths at the upper and lower survey stations. The length of the arc between two stations is the measured depth between surveys. [1,2,5,7,9]

The equations are complicated and are not easily calculated in the field without a programmable calculator or computer. In the equations, the inclination and azimuth are entered as degrees. [1,2,5,7,9]

Minimum curvature method: The minimum curvature method is similar to the radius of curvature method in that it assumes that the wellbore is a curved path between the two survey points. The minimum curvature method uses the same equations as the balanced tangential multiplied by a ratio factor which is defined by the curvature of the wellbore. Like the radius of curvature, the equations are more complicated and not easily calculated in the field without the aid of a programmable calculator or computer. [1, 2, 5, 7, 9]

The main objective of the present work is to introduce a new developed model based on both average angles and balanced tangential methods. In addition, the suggested model is to maximize the advantages of the previous models by combining them into the new model. Through the new model called as balanced tangential & average angle model, The new developed model assume that the actual well path can be approximated by two straight line segments of equal length and inclination angles at upper and lower segment have been averaged, also azimuth angles have been averaged at upper and lower segment.

For upper segment average inclination angle equal $\left(\frac{\alpha_i + \alpha_{i-1}}{2} + \alpha_{i-1}\right) / 2$ and average azimuth angle equal $\left(\frac{A_i + A_{i-1}}{2} + A_{i-1}\right) / 2$. For lower segment average inclination angle equal $\left(\frac{\alpha_i + \alpha_{i-1}}{2} + \alpha_i\right) / 2$ and average azimuth angle equal $\left(\frac{A_i + A_{i-1}}{2} + A_i\right) / 2$. As shown in figure 1

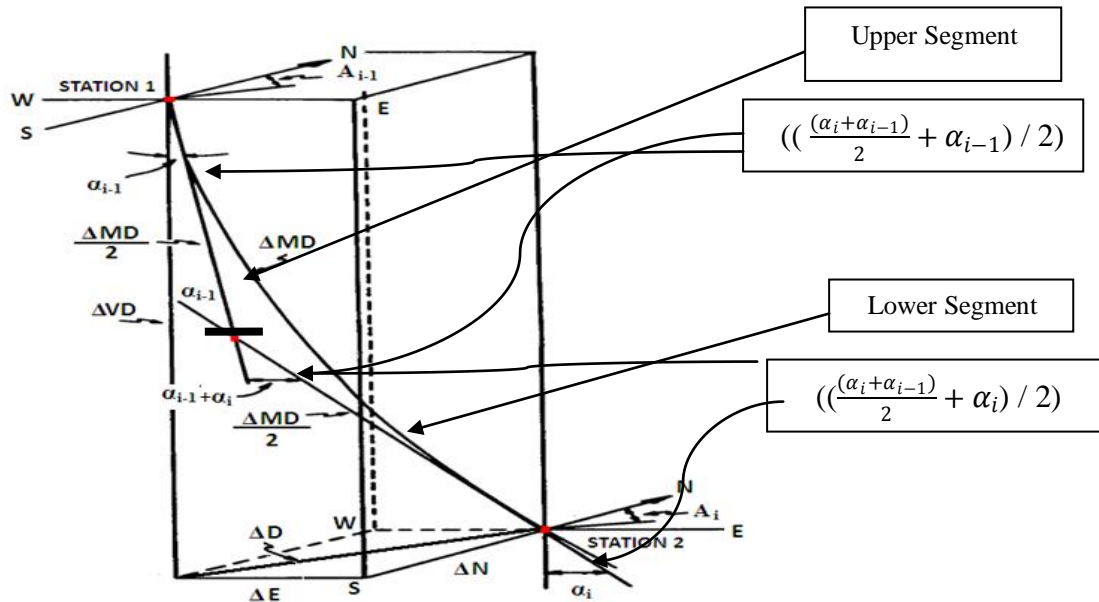


Figure 1 New model (balanced tangential & average angle model)

From plotting in Fig. 1 the equations for new model can be summarized as follows: Vertical distance between any two points on wellpath:

$$\Delta VD_i = \frac{\Delta MD_i}{2} \left(\cos \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_{i-1} \right) / 2 + \cos \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_i \right) / 2 \right)$$

Total true vertical depth: $TVD = \sum_{i=1}^n \Delta VD_i$

Horizontal distance between any two points on wellpath:

$$\Delta D_i = \frac{\Delta MD_i}{2} \left(\sin \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_{i-1} \right) / 2 + \sin \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_i \right) / 2 \right)$$

Total Horizontal distance: $HD = \sum_{i=1}^n \Delta D_i$

East direction between any two points on wellpath:

$$E_i = \frac{\Delta MD_i}{2} \left(\left(\sin \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_{i-1} \right) / 2 * \sin \left(\frac{(A_i + A_{i-1})}{2} + A_{i-1} \right) / 2 \right) + \left(\sin \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_i \right) / 2 * \sin \left(\frac{(A_i + A_{i-1})}{2} + A_i \right) / 2 \right) \right)$$

Total East direction:

$$E = \sum_{i=1}^n \Delta E_i$$

North direction between any two points on wellpath:

$$\Delta N_i = \frac{\Delta MD_i}{2} \left(\left(\sin \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_{i-1} \right) / 2 * \cos \left(\frac{(A_i + A_{i-1})}{2} + A_{i-1} \right) / 2 \right) + \left(\sin \left(\frac{(\alpha_i + \alpha_{i-1})}{2} + \alpha_i \right) / 2 * \cos \left(\frac{(A_i + A_{i-1})}{2} + A_i \right) / 2 \right) \right)$$

Total North direction:

$$N = \sum_{i=1}^n \Delta N_i$$

Available data

In this study, we will introduce the basic data about the three fields from which the wells were taken as one well for every field, as showing in the table 1

Table (1) General information about wells which are used in this study

Well No	A 92	FD 31	5I17
Field	1	2	3
Well profile	Type I(Build and Hold)	Type II (Build , Hold and Drop)	Type III (Deep kick off and Build)

CONCLUSIONS

Compares five the different methods with new model using data taken from actual fields (Measured Depth, Borehole Inclination and Borehole Azimuth (corrected to relevant North). at different type of well profile build & hold, S shape and Deep Kick off and Build. The results of various calculation method tabulated in tables from 1-3. Results calculated by minimum curvature method used as reference to comparison.

The results obtained during the present work indicated that:

1. New model is more accurate method to calculate true vertical depth (TVD) for all type of wells trajectory
2. The differences among new model, average angle, balanced, and radius of curvature, methods are so small, that any of the methods could be used for calculating the trajectory.
3. The least accurate method is tangential method for all types of trajectory.

Table 2 Comparison of Accuracy of Various Calculation Method with New Model for Build and hold well (A 92)

Method	TVD & difference from MC*		HD & difference from MC*		North displacement & difference from MC*		East displacement & difference from MC*	
Minimum Curvature	14147.07	0.00	3160.05	0.00	3126.98	0.00	-455.98	0.00
Tangential	14139.44	7.63	3241.06	-81.01	3152.49	-25.51	-459.82	3.84
Average Angle	14147.16	-0.09	3215.14	-55.09	3102.41	24.57	-454.25	-1.73
Balance	14146.94	0.13	3215.08	-55.03	3116.90	10.08	-455.91	-0.07
New Model	14147.10	-0.03	3215.12	-55.07	3114.98	12.00	-455.78	-0.20
Radius of Curvature	14147.04	0.03	3215.19	-55.14	3114.80	12.18	-455.97	-0.01

* Minimum Curvature

Table 3 Comparison of Accuracy of Various Calculation Method with New Model for Build hold and drop well (FD 31)

Method	TVD & difference from MC*		HD & difference from MC*		North displacement & difference from MC*		East displacement & difference from MC*	
Minimum curvature	6447.47	0.00	8678.98	0.00	-7746.58	0.00	-3914.16	0.00
Tangential	6437.32	10.15	8716.31	-37.33	-7768.62	22.04	-3930.72	16.56
Average angle	6447.60	-0.13	8688.60	-9.62	-7747.29	0.71	-3913.57	-0.59
Balance	6447.07	0.40	8688.11	-9.13	-7746.22	-0.36	-3913.98	-0.18
Radius of curvature	6447.52	0.05	8688.03	-9.05	-7746.28	0.30	-3914.30	-0.14
New model	6447.47	0.00	8688.47	-9.49	-7747.02	0.44	-3913.68	-0.48

*Minimum Curvature Method

Table 4 Comparison of Accuracy of Various Calculation Method with New Model for Deep Kick off & Build well (5I17)

Method	TVD & difference from MC*		HD & difference from MC*		North displacement & difference from MC*		East displacement & difference from MC*	
Minimum Curvature	7224.75	0.00	2464.50	0.00	2445.65	0.00	287.29	0.00
Tangential	7208.14	16.61	2531.56	-67.03	2510.29	-64.64	304.41	-17.12
Average angle	7224.86	-0.11	2464.56	-0.06	2430.65	15.00	278.91	8.38
Balance	7224.50	0.25	2464.38	0.15	2439.50	6.15	281.27	6.02
Radius of curvature	7224.52	0.23	2464.45	0.05	2440.28	5.37	283.12	4.17
New model	7224.77	-0.02	2464.49	0.01	2438.33	7.32	281.32	5.97

* Minimum Curvature Method

REFERENCES

- 1) Rabia, H. (1987), "Well Engineering and Construction". Penn Well Pub. Co., Tulsa, Oklahoma, pp (433-511).
- 2) Brown, J. (2000), "Drilling Engineering". Institute of Petroleum Engineering, Heriot-Watt University, 1995, USA, pp (443-491).
- 3) Bourgoyne Jr, et al. (1986), "Applied Drilling Engineering". Society of Petroleum Engineers, USA, pp (351-472).
- 4) Baker Hughes INTEQ, (2007). "Drilling Engineering Workbook". A Distributed Learning Course 80270H Rev. B, USA, pp (181-284).
- 5) R.R. Ilyasov, et al. (2014) "Automation of Optimal Well Trajectory Calculations" SPE, Moscow, Russia, 14-16 October
- 6) Carden, R. S. and Grace, R. D., (1999), "Horizontal and Directional Drilling PetroSkills", LLC. And OGC Co. Tulsa, Oklahoma, USA, pp (1-113).
- 7) Jim Short, J. A. (1993), "Introduction to Directional and Horizontal Drilling". Penn Well Pub. Co., Tulsa, Oklahoma, pp (1-122).
- 8) Mitchell, B., (1995), "Advanced Oil Well Drilling Engineering". Handbook and Computer Programs. 10th Edn., 1st Revision - July. Mitchell Engineering Pub., USA, pp (292-463).
- 9) Siavoshi, J., (2004), "Drilling Technology". Memorial University of Newfoundland, Earth Sci. Dept., Canada, pp (94-105).
- 10) Gabolde, G. and Nguyen, J. P., (1999), "Drilling Data Handbook" .7th Edn., Institut Francais du Petrole Publ., Editions Technip, Paris, pp(413-455).