



# CFD Analysis of a 3d Aerofoil using Ansys Fluent

Leena Bansal<sup>1</sup>, Sandeep Chauhan<sup>2</sup>, Dr. Chandan Kumar<sup>3</sup>, Dr. S. M. Muzakkir<sup>4</sup>, Hasan Zakir Jafri<sup>5</sup>

M. Tech Scholar, Department of Mechanical Engineering, NIET, Gr. Noida (India)<sup>1</sup>

Assistant Professor, Department of Mechanical Engineering, NIET, Gr. Noida (India)<sup>2</sup>

Professor, Department of Mechanical Engineering, NIET, Gr. Noida (India)<sup>3</sup>

Associate Professor, Department of Mechanical Engineering, Jamia Millia Islamia, New Delhi (India)<sup>4</sup>

Assistant Professor, Department of Mechanical Engineering, Al-Falah University, Faridabad (India)<sup>5</sup>

**Abstract:** Aerofoils finds a wide application in the field of Aviation and Automobile industry and each application demands a different purpose to be served. Cargo planes required high lift at low speed, while racing cars requires a down force to attain greater speeds. Aerofoil design is important field which requires an extensive experimental work and simulations. In this paper an Aerofoil was analysed using CFD to find out the parameters such as Lift, Drag, Pressure and velocity distribution around it. The simulation was carried out using ANSYS FLUENT and the pressure and velocity distribution was measured on thirteen strategic points over the surface of aerofoil.

**Keywords:** Aerofoil, CFD, Lift, Drag, ANSYS FLUENT.

## I. INTRODUCTION

A structure with bended surfaces intended to give the most ideal proportion of lift to drag in flight, utilized as the fundamental type of the wings, blades, and tail planes of generally flying machine. As a wing travels through air, the air is part and goes above and underneath the wing. The wing's upper surface is melded so the air hurrying over the top accelerates and extends. This reduction the pneumatic stress over the wing. The air streaming underneath the wing moves in a straighter line, so its speed and gaseous tension continues as before. Since high pneumatic force dependably moves toward low gaseous tension, the air underneath the wing pushes upward toward the air over the wing. The wing is in the centre, and the entire wing is "lifted." The quicker a plane moves, the more lift there is. Also, when the drive of lift is more noteworthy than the compel of gravity, the plane can fly.

1.1 Pressure distribution over the Aerofoil Pressure distribution over an aerofoil due to streamlined air over it provides lift. In an un symmetrical aerofoil: The upper surface is more curved which deliver the upper surface lift. The lower surface has lesser curve which create the lower surface drive. Net lift created by the aerofoil is the contrast between lift on the upper surface and the drive on the lower surface. Net lift is successfully focused at a point on the aerofoil called the center of pressure.

## II. LITERATURE REVIEW

From its beginning, the National Advisory Council for Flight (NACA) perceived the significance of aerofoils as a

foundation of aeronautical innovative work. In its first yearly answer to the Congress of the United States, the NACA required "the advancement of more proficient wing segments of common shape, exemplifying reasonable measurements for a practical structure, with direct go of the focal point of weight and as yet managing an extensive scope of approach joined with productive activity [1]. By 1920, the Board of trustees had distributed an abstract of exploratory outcomes from different sources [2]. Presently, the advancement of aerofoils by the NACA was started at the Langley Aeronautical Lab [3]. The main arrangement of aerofoils, assigned "M type" for Max M. Munk, was tried in the Langley Variable-Thickness Tunnel [4]. This arrangement was huge on the grounds that it spoke to an orderly way to deal with aerofoil advancement rather than prior, arbitrary, cut-and-attempt approaches. This observational approach, which included changing the geometry of a current aerofoil, finished in the advancement of the four- and five-digit-arrangement aerofoils in the mid 1930's [5-7].

Simultaneously, Eastman N. Jacobs started take a shot at laminar-stream aerofoils. Roused by talks with B. Melvill Jones and G. I. Taylor in Britain, Jacobs modified the aerofoil examination technique for Theodore [8] to decide the aerofoil shape that would create the weight circulation he fancied (diminishing weight with separation from the main edge over the forward bit of the aerofoil). This weight dissemination, it was felt, would maintain laminar stream.



Accordingly, the fundamental thought behind present day aerofoil configuration was imagined: the sought limit layer qualities result from the weight dissemination which comes about because of the aerofoil shape. The converse technique numerically changes the weight appropriation into an aerofoil shape though the creator naturally/observationally changes the limit layer attributes beyond any doubt dissemination. The subsequent aerofoils, the most prominent of which are the 6-digit arrangement, were tried in the Langley Low-Turbulence Tunnel and the Langley Low-Turbulence Weight Tunnel (LTPT) in the late 1930's and mid 1940's [9-10]. To focus on fast streamlined features, the NACA escaped the aerofoil business in the 1950's, leaving the world with countless outlined and tentatively tried aerofoils [11]. The four-and five-digit-arrangement, turbulent-stream aerofoils created moderately high greatest lift coefficients in spite of the fact that their drag coefficients were not especially low while the 6-arrangement, laminar-stream aerofoils offered the likelihood of low drag coefficients despite the fact that their most extreme lift coefficients were not particularly high. The predicament confronted by the flying machine architects of the day over the sort of aerofoil to choose, laminar-or turbulent-stream, was comprehended by the accessible development procedures, which delivered surfaces that were inadequately smooth and inflexible to bolster broad laminar stream. The aerofoil scene then moved to Germany where F. X. Wortmann and Richard Eppler were occupied with laminar-stream aerofoil outline. Wortmann utilized peculiarity and vital limit layer techniques [12–14] to build up a list of aerofoils proposed principally for sailplanes [15]. Since the hypothetical techniques he utilized were moderately unrefined, be that as it may, last assessment of the aerofoils was performed in a low-turbulence wind tunnel. Eppler, then again, sought after the advancement of more exact hypothetical techniques [16 and 17]. The successor to the NACA, the National Air transportation and Space Organization (NASA), re-emerged the aerofoil field in the 1960's with the plan of the supercritical aerofoils by Richard T. Whitcomb [18]. The lessons learned amid the improvement of these transonic aerofoils were exchanged to the plan of a progression of turbulent-stream aerofoils for low-speed flying machine. The fundamental target of this arrangement of aerofoils was to accomplish higher most extreme lift coefficients than the prior NACA aerofoils. It was accepted that the stream over these aerofoils would be turbulent in light of the development systems then being used by general aeronautics producers. While these NASA, turbulent-stream aerofoils [19] achieved higher greatest lift coefficients, the voyage drag coefficients were no lower than those of the NACA four-and five-digit-arrangement aerofoils. Accentuation was consequently moved toward regular laminar-stream (NLF) aerofoils trying to consolidate the low-drag qualities of the NACA 6-arrangement aerofoils with the high-lift attributes of the NASA low-speed aerofoils. In this unique

situation, the term 'characteristic laminar-stream aerofoil' alludes to an aerofoil that can accomplish critical degrees of laminar stream (30-percent harmony) on both the upper and lower surfaces at the same time, exclusively through positive weight slopes (no limit layer suction or cooling). The approach of composite structures [20] has additionally powered the resurgence in NLF explore. This development strategy permits NLF aerofoils to accomplish, practically speaking, the low-drag qualities measured in low-turbulence wind tunnels [21].

A related favourable position of the hypothetical aerofoil outline strategy is that it permits a wide range of ideas to be investigated monetarily. Such endeavours are by and large unfeasible in wind tunnels in light of time and cash imperatives. In this manner, the requirement for a hypothetical aerofoil outline technique is triple: in the first place, for the plan of aerofoils that fall outside the scope of appropriateness of existing indexes; second, for the plan of aerofoils that all the more precisely match the necessities of the expected application; and third, for the monetary investigation of numerous aerofoil ideas.

### III. CFD ANALYSIS

The CFD analysis on aerofoil for analysing the flow was performed in ANSYS FLUENT. It also shows the use of multiple fluid bodies and edge sizing. The entire meshed fluid field and a portion of the mesh near the aerofoil are shown and the Lift and Drag forces along with the Pressure and velocity distribution are obtained.

The mesh was generated using free medium meshing with tetrahedron mesh with 19476 Nodes and 102916 Elements

3.1 Results obtained by CFD analysis

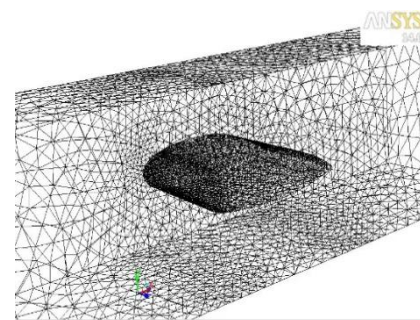


Figure1: Aerofoil Mesh (Close View)

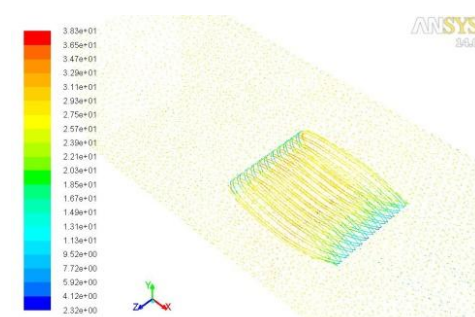


Figure 2: Velocity Vectors (Iso)

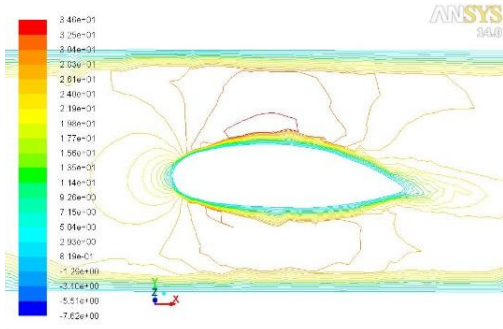


Figure 3: Velocity Vectors

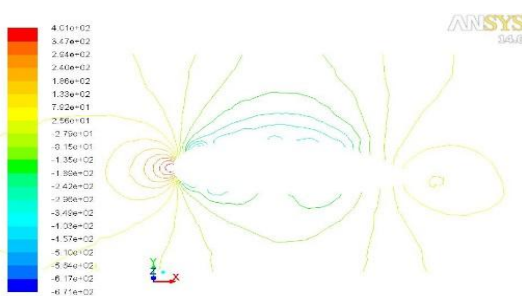


Figure 4: Static Pressure

IV RESULTS AND DISCUSSION

A detailed CFD analysis was performed using ANSYS FLUENT software. The pressure and velocity was measured along the given points using the software and the results are tabulated below

TABLE 1 VELOCITY DISTRIBUTION ALONG AEROFOIL USING CFD

Point	1	2	3	4	5	6	7
Velocity	33.9	33.9	33.9	33.9	33.9	33.9	33.9
Point	8	9	10	11	12	13	
Velocity	33.9	33.9	33.9	33.9	33.9	33.9	

TABLE 2 LIFT AND DRAG COEFFICIENTS

Sr.No.	Parameters	CFD Analysis
1	CL	0.742
2	CD	0.169

This can be concluded that a CFD modelling can be used in place of Experimental analysis to prevent time and cost involved in experimentation. Also, ANSYS (CFD) is a fast growing component in computer aided engineering, plays a very vital role in reducing costs and turn-around times in the design and development of aerofoils and complete aircrafts also. ANSYS (CFD) simulation software is a comprehensive suite of products that allows us to predict the impact of fluid flows on model. If we use CFD

software for calculating the parameter in flow system, then it can save the time and cost. CFD costs much less than experiments because physical modifications are not required.

REFERENCES

- [1] National Advisory Committee for Aeronautics: First Annual Report of the National Advisory Committee for Aeronautics. 1915.
- [2] National Advisory Committee for Aeronautics : Aerodynamic Characteristics of Aerofoils .NACA Rep. 93, 1920.
- [3] Hansen, James R.: Engineer in Charge. NASA SP-4305, 1987.
- [4] Munk, MaxM and Miller, EltonW "Model Tests with a Systematic Series of 27 Wing Sections at Full Reynolds Number". NACA Rep. 221, 1925.
- [5] Jacobs, Eastman N Ward, Kenneth E and Pinkerton Robert M "The Characteristics of 78 Related Aerofoil Sections from Tests in the Variable-Density Wind Tunnel. NACA Rep.460,1933.
- [6] Jacobs Eastman N and Pinkerton Robert M "Tests in the Variable-Density Wind Tunnel of Related Aerofoils Having the Maximum Camber Unusually far Forward" .NACA Rep.537,1935.
- [7] Jacobs Eastman N, Pinkerton, Robert M and Greenberg Harry "Tests of Related Forward- Camber Aerofoils in the Variable-Density Wind Tunnel. NACA Rep. 610, 1937.
- [8] Theodore "Theory of Wing Sections of Arbitrary Shape". NACA Rep.411,1932.
- [9] Jacobs, Eastman N. "Preliminary Report on Laminar-Flow Aerofoils and New Methods Adopted for Aerofoil and Boundary Layer Investigations.NACA WRL-345,1939
- [10] Abbott H, Von Doenhoff Albert E and Stivers Louis S "Summary of Aerofoil Data" .NACA Rep. 824, 1945. (Supersedes NACA WR L-560.)
- [11] Abbott, Ira H.; and Von Doenhoff, Albert E.: Theory of Wing Sections. Dover Publ., Inc. c.1959.
- [12] Truckenbrodt, E, Die Berechnungder "The Calculation of the Profile Shape from Specified Velocity Distribution". Ingenieur Archiv, Bd. 19, Heft 6, 1951, pp. 365–377.
- [13] Truckenbrodt E " A Method of Quadrature for Calculation of the Laminar and Turbulent Boundary Layer in Case of Plane and Rotationally Symmetrical Flow. NACATM1379,1955. (Translated from Ingenieur-Archive Bd. 20, Heft 4, 1952, pp. 211–228.)
- [14] Wortmann F.X, "Progress in the Design of Low Drag Aerofoils Boundary Layer and Flow Control, Volume 2, G. V. Lachmann, ed., Pergamon Press (London), 1961, pp. 748–770.
- [15]Althaus Dieter and Wortmann Franz Xaver "Profile katalogI. (Stuttgart Profile Catalog I.) Friedr. Vieweg & Sohn (Braunschweig), 1981.
- [16]Eppler,R "Direct Calculation of Aerofoils from Pressure Distribution". NASATTF-15, 417, 1974. (Translated from Ingenieur-Archive, Bd. 25, Heft 1, 1957, pp. 32–57.)
- [17] Eppler R, "Practical Calculation of Laminar and Turbulent Bled-Off Boundary Layers" .NASA TM-75328, 1978. (Translated from Ingenieur- Archiv, Bd.32,Heft4,1963,pp.221–245.)
- [18] Whitcomb, Richard T and Clark Larry R "An Aerofoil Shape for Efficient Flight at Super- critical Mach Numbers". NASA TM X-1109, 1965.
- [19] Mc Ghee, Robert J, Beasley, William D.and Whitcomb Richard T "NASA Low and Medium Speed Aerofoil Development". NASA TM-78709, 1979.
- [20] Naegele, H and Eppler, R "Plastic Sailplane FS-24 Phoenix. Soaring", vol. 22, no. 4, July- Aug. 1958, pp. 2–5. (Translated from Aero Revue, 33, Mar. 1958, pp. 140–143.)
- [21] Eppler, Richard "Some New Aerofoils, Science and Technology of Low Speed and Motorless Flight", NASA CP-2085, Part I, 1979, pp. 131–153.
- [22] Tangler J L and Somers D M "Status of the Special Purpose Aerofoil Families" SERI/TP-217-3264, Dec. 1987.
- [23] Eppler Richard "Aerofoil Program System PROFIL 00" User’s Guide Richard Eppler, c.2000.



- [24] McGhee, Robert J, Beasley, William D and Foster Jean M " Recent Modifications and Calibration of the Langley Low-Turbulence Pressure Tunnel". NASA TP-2328, 1984.
- [25] vanIngen J. L. Boermans, L. M. M. and Blom J. J. H "Low-Speed Aerofoil Section Research at Delft University of Technology. ICAS-80-10.1, Munich, Oct. 1980.
- [26] Brophy, Christopher M "Turbulence Management and Flow Qualification of the Pennsylvania State University Low Turbulence, Low Speed, Closed Circuit Wind Tunnel. M. S. Thesis, Pennsylvania State Univ., 1993.
- [27] Somers, Dan M " Effects of Aerofoil Thickness and Maximum Lift Coefficient on Roughness Sensitivity". Aerofoils, Inc., 1998.
- [28] Fernández Oro, J.M. Argüelles Díaz, K. M. Santolaria Morros, C. Blanco Marigorta, E. "Unsteady flow and wake transport in a low-speed axial fan with inlet guide vanes, Journal of Fluids Engineering 2008, 129,1015–1029.
- [29] Fernández Oro, J.M. Argüelles Díaz K. M., Santolaria Morros, C. Blanco Marigorta, E "On the structure of turbulence in a low-speed axial fan with inlet guide vanes. Experimental Thermal and Fluid Science, 2007, 32,316–331.
- [30] Davidson, P.A., 2010. Turbulence: An Introduction for Scientists and Engineers. Oxford University Press.
- [31] Masoud Mirzaei, Mohammad Hadi Karimi, Mohammad Ali Vaziri, "An investigation of a tactical cargo aircraft aft body drag reduction based on CFD analysis and wind tunnel tests", Aerospace Science and Technology 23 (2012) 263–269
- [32] María Rodríguez Lastran, Jesús Manuel Fernández Oro, Mónica Galdo Vega, Eduardo Blanco Marigorta, Carlos Santolaria Morros, "Novel design and experimental validation of a contraction nozzle for aerodynamic measurements in a subsonic wind tunnel" Journal of Wind Engineering and Industrial Aerodynamics, 2013, 201-209